
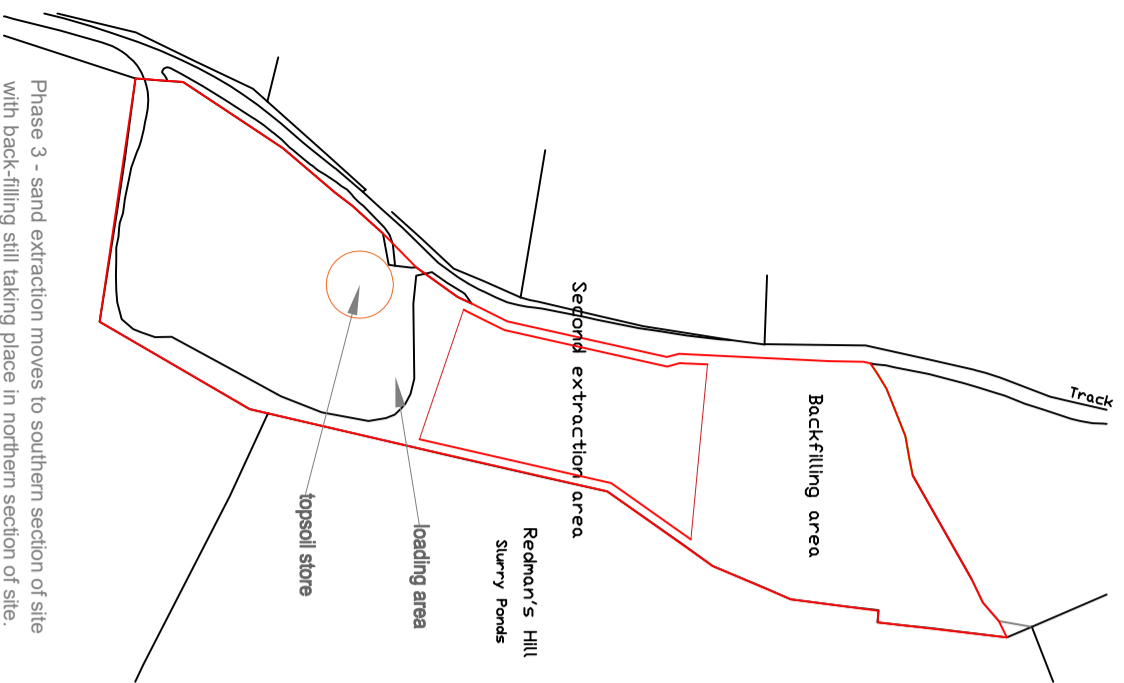



**DORSET
PROPERTY
SURVEYS**

**Dorset Property Surveys,
Rumbles,
Bere Regis,
Dorset
BH20 7HT
Tel 01929 472609
info@dorsetsurveys.co.uk**


**Client: Redmans Sand
Address: Redmans Quarry Three Legged Cross BH21 6SD
Drawing Title: Phasing scheme
Dwg. No: DPS-17-0125 M2
Scale: 1:2,500 printed on A3
Date: 30th May 2018
Revision:**

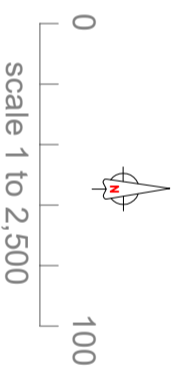


Phase 3 - sand extraction moves to southern section of site with back-filling still taking place in northern section of site.
Timescale - Sand extraction moves to southern section in months 26 to 50. Worked in two stages each 25,000 tonnes

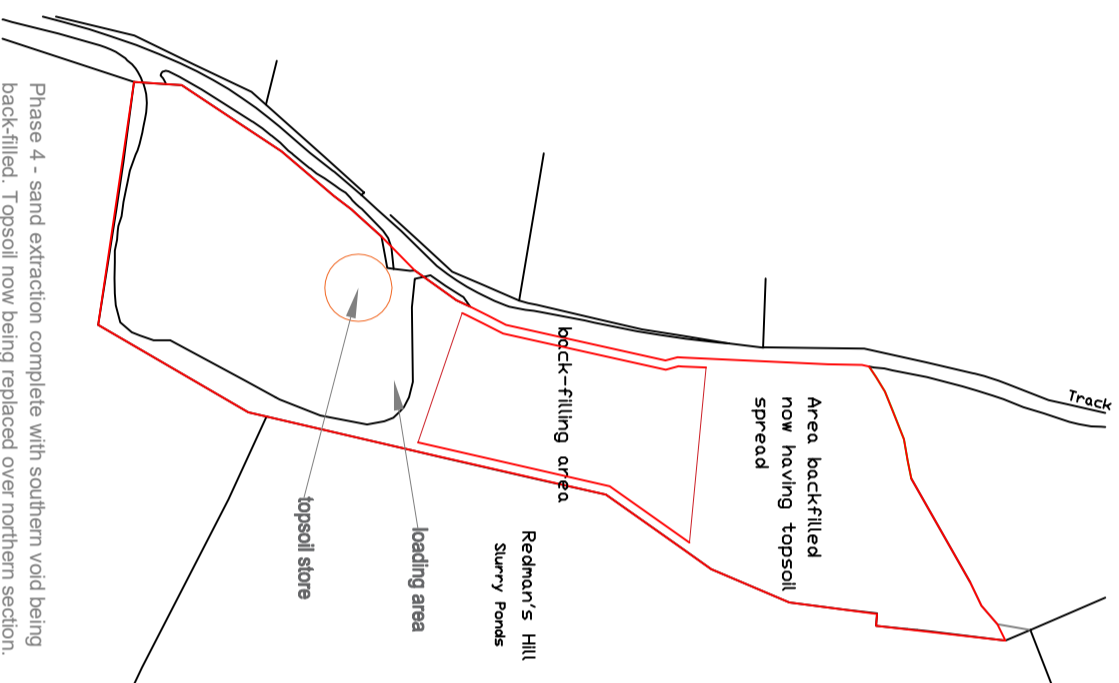

Phase 4 - sand extraction complete with southern void being back-filled. Topsoil now being replaced over northern section.
Timescale - Month 50 all sand extraction complete. Northern section reinstated to grassland. Backfilling still taking place in southern section.

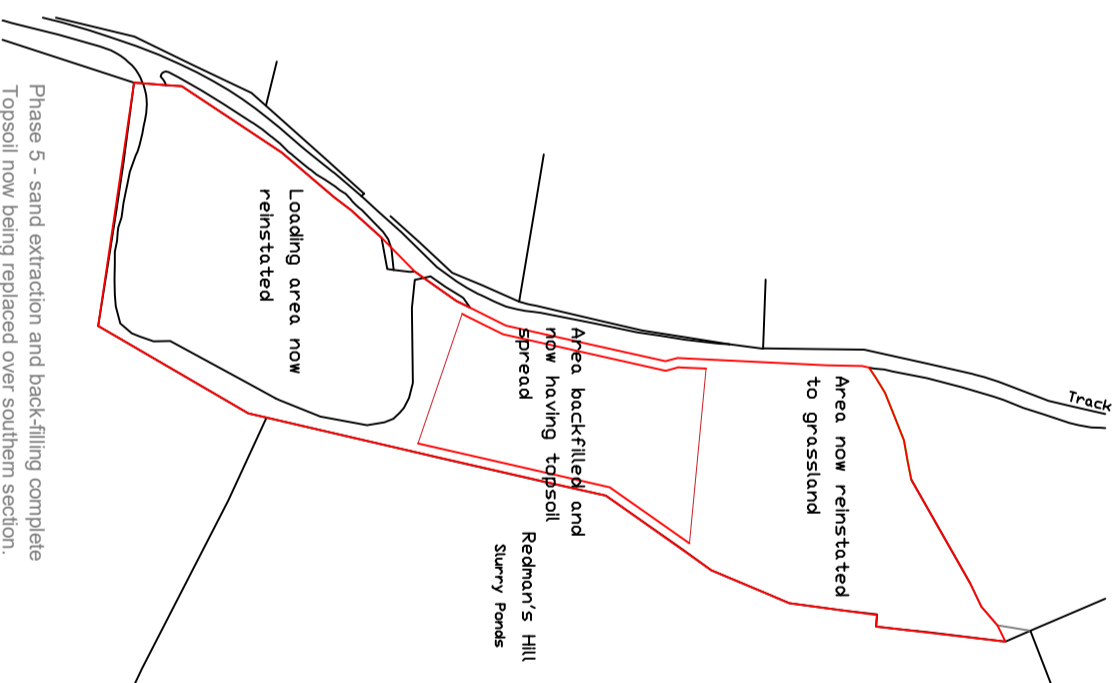

Phase 5 - sand extraction and back-filling complete. Topsoil now being replaced over southern section.
Timescale - Month 58 all sand extraction and back-filling complete. Southern section being reinstated to grassland.

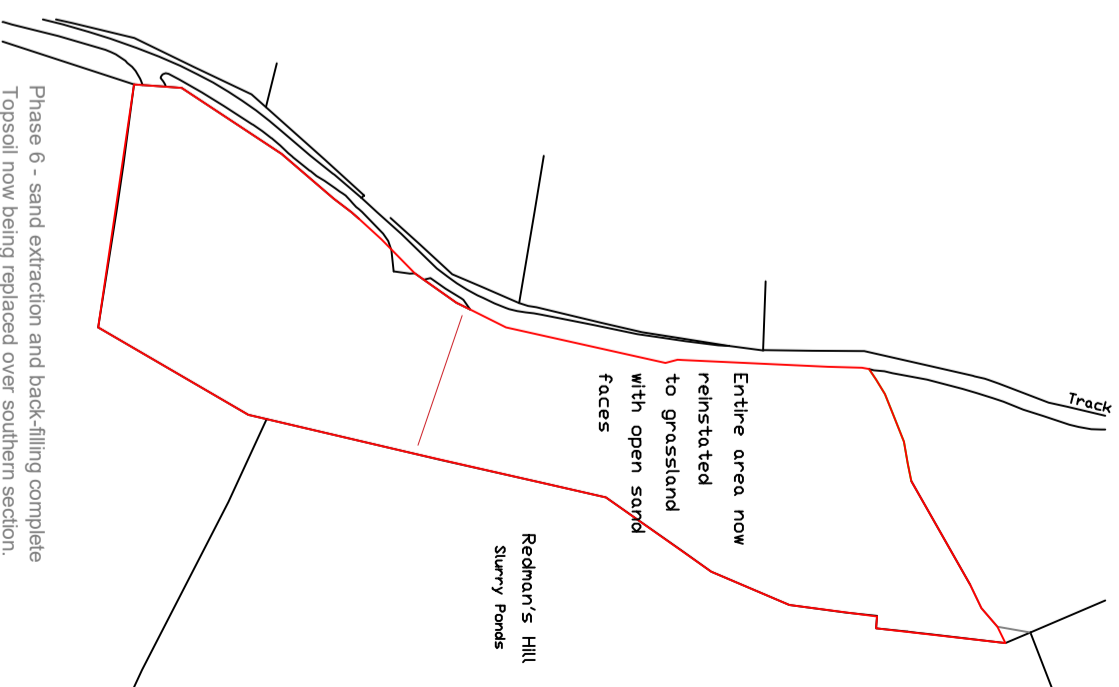

Phase 6 - sand extraction and back-filling complete. Topsoil now being replaced over southern section.
Timescale - Month 60 all sand extraction and back-filling complete. Southern section fully reinstated to grassland with open sand faces.